

UpRight
TM12

Vertical mast

telescopic lift



working height up to
18ft.(5.5m.) maximum

Ultra-compact design
enables lift to fit into
confined work areas

Drives through standard
doorway or narrow aisles

500lbs.(227kg.) platform
capacity for 2 people
plus tools

Transportable in most
passenger elevators


Non marking tires
protect floor finishes

5 year structural warranty

Photograph shown CE. model

specifications	TM12
working height A	18ft. (5.6m.)
platform height B	12ft. (3.7m.)
maximum drive height	12ft. (3.7m.)
platform capacity	500lbs. (227kg.)
platform size (inside)	29in. x 41in. (0.74m. x 1.04m.)
weight	1,710lbs. (776kg.)
stowed height C	64.75in. (1.7m.)
length D	53.5in. (1.36m.)
width E	30in. (0.76m.)
drive speed - max. with platform raised	2.27mph. (3.65 km/h.) .62mph. (1.0km/h.)
gradeability	25% (14 degrees)
inside turning radius	14.5in. (0.37m.)
ground clearance	3in. (76 mm.)
lift speed - raise/lower	18 seconds/25 seconds
toeboards	6in. (152mm.)
control system	one-hand controller (lift and drive)
drive system	dual front hydraulic motors
tires	12" (305 mm) dia. solid rubber, non-marking
power source	24V4hp DC electric motor 4-220 Ah batteries
battery charger	90V - 240V - 25 amp automatic
parking brake	2 wheel, spring-applied, hydraulically-released with manual override

* Working height in the U.S. is 6ft. above platform height. Metric working height is 2m. above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

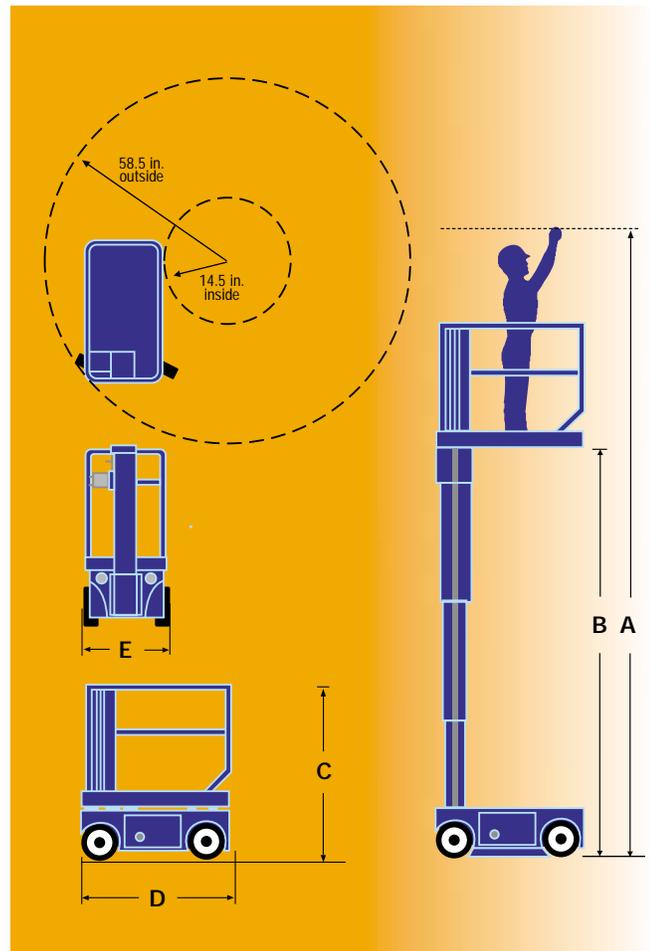

standard features

Only 30 in. (0.76 m) wide and 53.5 in. (1.36 m) long

Proportional control

Drive while elevated at automatic low speed

24V DC 4hp electric motor provides clean, pollution-free power for indoor use

Descent and tilt alarms

High amp hour rating give long usage between charges

25 amp charger for easy overnight re-charging

Emergency lowering at ground

Non-marking, solid rubber tires

Crane lift points

Selectable motion alarm


1year parts/service

5 year structural warranty

options

Special paint colors

Environmental green oil



manufactured by

UpRight

The UpRight TM12 provides a safe, efficient means of working at height in restricted spaces typically encountered in offices, retail stores, hotels, public buildings or crowded industrial aisles. Its compact size also makes it ideal for applications such as stock picking and record storage retrieval. Operators simply step onto the platform, drive to the work location and elevate to the desired height. When the job is complete, the lift can be quickly lowered and returned to a convenient storage area.



UpRight

www.upright.com
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840